




[Home](#) > [Industrial Engines](#) > [Final Tier 4 Stage V](#)
> [6068CI550 6.8L Industrial Diesel Engine](#)

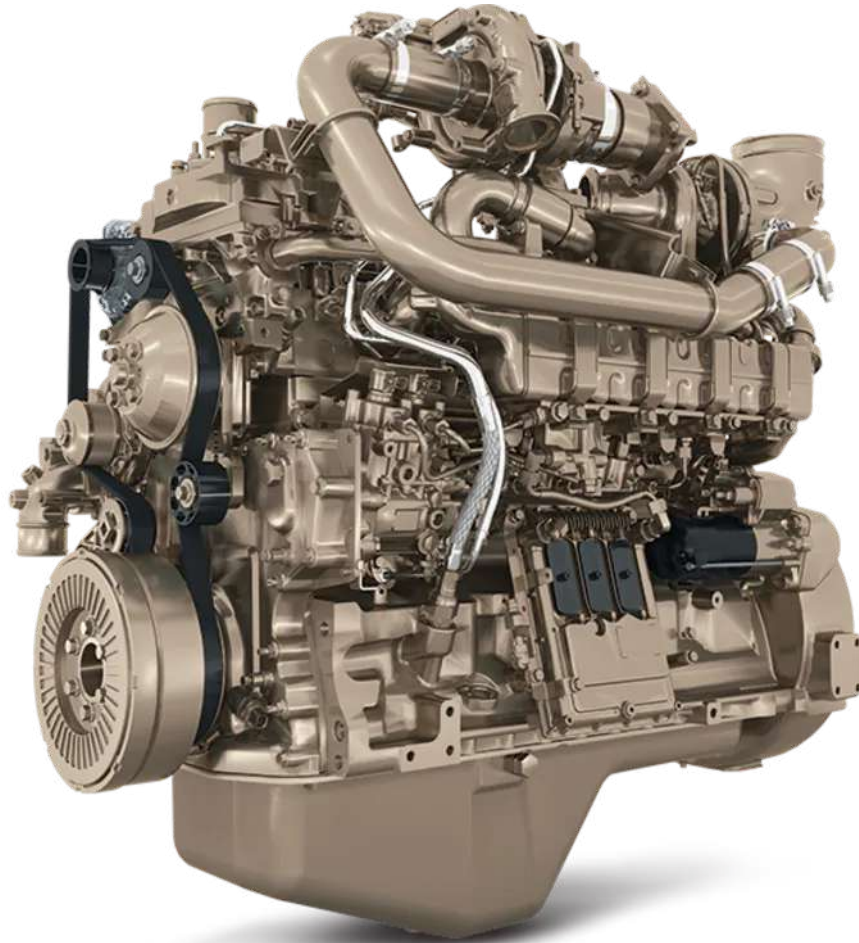

6068CI550

6.8L Industrial Diesel Engine

- PowerTech™ PSS
- 168-224 kW (225-300 hp) @ 2200-2400 rpm
- Continuous, Heavy Duty, Intermittent

[Contact a Distributor](#)

[Final Tier 4/Stage V Brochure](#) >

[Final Tier 4/Stage V Selection Guide](#) >

[Emissions Brochure](#) >

Features

[Collapse All](#)

— Stage V.

- John Deere has billions of hours of field experience with off-highway diesel engine technologies and launched many of its engines ahead of EPA and EU deadlines, and is ready to meet Stage V emissions regulations using our proven diesel particulate filter (DPF) solutions. In most cases, OEM customers currently using a John Deere engine with a diesel particulate filter (DPF) won't have to re-engineer machine design to meet the requirements of Stage V regulations. Our engineers continue to employ a global network of technical resources and the latest technology to lower emissions while improving performance and fluid efficiency.

— Series turbocharger

- Air is first drawn into the low-pressure turbocharger and compressed to a higher pressure. The compressed air is then drawn into the high-pressure turbocharger, where the air is further compressed. The high-pressure air is then routed through a charge air cooler and into the engine's intake manifold. By splitting the work between two turbochargers, both can operate at peak efficiency and at slower rotating speeds — lowering stress on turbocharger components and improving reliability. Series turbocharging delivers more boost pressure than single turbocharger configurations, which results in higher power density, improved low-speed torque, and improved high altitude operation.

— Exhaust filters

- These engines utilize a catalyzed exhaust filter that contains a diesel oxidation catalyst (DOC) and a diesel particulate filter (DPF). The DOC reacts with exhaust gases to reduce carbon monoxide, hydrocarbons, and some particulate matter (PM). The downstream DPF traps and holds the remaining PM. Trapped particles are oxidized within the DPF through a continuous cleaning process called passive regeneration. Passive regeneration occurs during normal operating conditions when heat from the

exhaust stream, and catalysts within the exhaust filter, trigger the oxidation of the trapped PM. If passive regeneration cannot be achieved due to low temperature, load, or speed, then PM is removed using active regeneration — an automatic cleaning process controlled by the exhaust temperature management system.

— Cooled exhaust gas recirculation (EGR)

- EGR cools and mixes measured amounts of cooled exhaust gas with incoming fresh air to lower peak combustion temperatures, thereby reducing Nox.
-

— Selective catalytic reduction (SCR)

- John Deere engines feature an SCR system that utilizes a urea-based additive, sometimes referred to as diesel exhaust fluid (DEF) to meet Stage V emission standards. A chemical reaction in the SCR catalyst converts urea and NOx emissions into nitrogen and water vapor.
-

— High-pressure common-rail (HPCR)

- The HPCR fuel system provides variable common-rail pressure and high injection pressures. It also controls fuel injection timing and provides precise control for the start, duration, and end of injection.
-

— Air-to-air aftercooled

- This is the most efficient method of cooling intake air to help reduce engine emissions while maintaining low-speed torque, transient response time, and peak torque. It enables an engine to meet emissions regulations with better fuel economy and the lowest installed costs.
-

— 4-valve cylinder head

- The 4-valve cylinder head provides excellent airflow resulting in excellent low-speed torque and transient response.
-

— Compact size

- Lower installed cost
 - Mounting points are the same as previous engine models
-

- John Deere electronic engine controls
 - Faster engine control unit (ECU) manages both the engine and the exhaust filter
 - Premium software option integrates with equipment or vehicles to reduce engineering and installation costs

-
- Big-engine durability
 - Replaceable (wet) cylinder liners
 - Single-piece steel piston with oil-cooling gallery
 - Full flow engine-mounted oil cooler
 - Up to 500-hour oil change

-
- Additional features
 - Glow Plugs cold start aid
 - Engine or remote mounted fuel filters
 - Gear-driven auxiliary drives
 - Self-adjusting poly-vee fan drive with optional variable-speed fan
 - Optional electric fuel transfer pump with “auto-prime” feature
-

Show Less

Specifications

Emissions Certifications

- CARB
- EPA Final Tier 4
- EU Stage V

General engine data

Model	6068CI550
Number of cylinders	6
Displacement-- L (cu in)	6.8 (415)
Bore and Stroke-- mm (in)	106 x 127 (4.2 x 5.0)
Compression Ratio	16.7 : 1
Engine Type	In-line, 4-cycle
Aspiration	Turbocharged and air-to-air aftercooled
Length - mm (in)	1160 (46.0)
Width-- mm (in)	768 (30.2)
Height-- mm (in)	1144 (45.0)
Weight, dry - kg (lb)	750 (1653)

Show More

Drivetrain Components

- Pump Drives
- Transmissions
- Axles
- Planetary Gear Drives
- Vehicle Electrification

Accessories

Engine Accessories Brochure

Parts

Engine Parts

Resources