




Type

- 4 Stroke
- Air Cooled
- V Twin
- Overhead valve
- Vertical Shaft

Performance curves

The power rating of this engine is the Net power rating tested on a production engine and measured in accordance with SAE J1349.Actual power output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

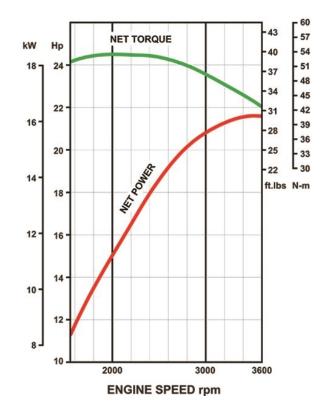

Technical Specifications

■ Engine Type	4-Stroke, Vertical Shaft, V-Twin, OHV, Air-cooled
■ Max. power	16.1 kW (21.6 hp) / 3600 rpm
Oil capacity (litres)	2.2
Number of cylinders	2
Displacement	726 cm³
■ Dimensions (L x W x H) (mm)	505 x 462 x 418
■ Bore x stroke	78 x 76 mm
■ Fuel tank capacity (litres)	
■ Max. torque	53.7 Nm (39.6 ft.lbs) / 2000 rpm
■ Dry weight	44.0 kg



Features

- Rotating metal grass screen
- Large, easy-to-access integrated clean-out ports
- Cast iron cylinder liners
- Internally vented carburetor with fuel shut-off solenoid
- Automatic compression release

- Dual-element air filtration with reinforced filter
- 90 degree V-twin
- Pressurised lubrication system
- Electronic spark ignition
- High-efficiency, centrifugal air intake system

Options

- Shaft variations
- 20 Amp charge coil
- Various oil drains

- Oil pressure switches
- Muffler



